



**BREAKER
TECHNOLOGY,
INC.**
an Astec company

CCP Series Mechanical Pulverizer

BTI's new CCP Series of Mechanical Pulverizers are designed for both Primary and Secondary demolition work, allowing the contractor to demolish, process and sort material, all with the one attachment. This unit works off the excavator's tilt cylinder, eliminating the expense of plumbing the machine.

Features & Benefits

Replaceable Heavy Duty Teeth

Fast and easy to change teeth in the field, with minimal downtime.

Replaceable Cutting Blades

Cuts reinforcing steel and cable. Blades can be rotated.

Separate Pivot Pin Connection


This protects the excavator's stick from possible damage.

Unique Tooth Design

Ensures maximum penetration and fragmentation.

Wear Resistant Steel

Constructed from high quality steel providing long life and durability.

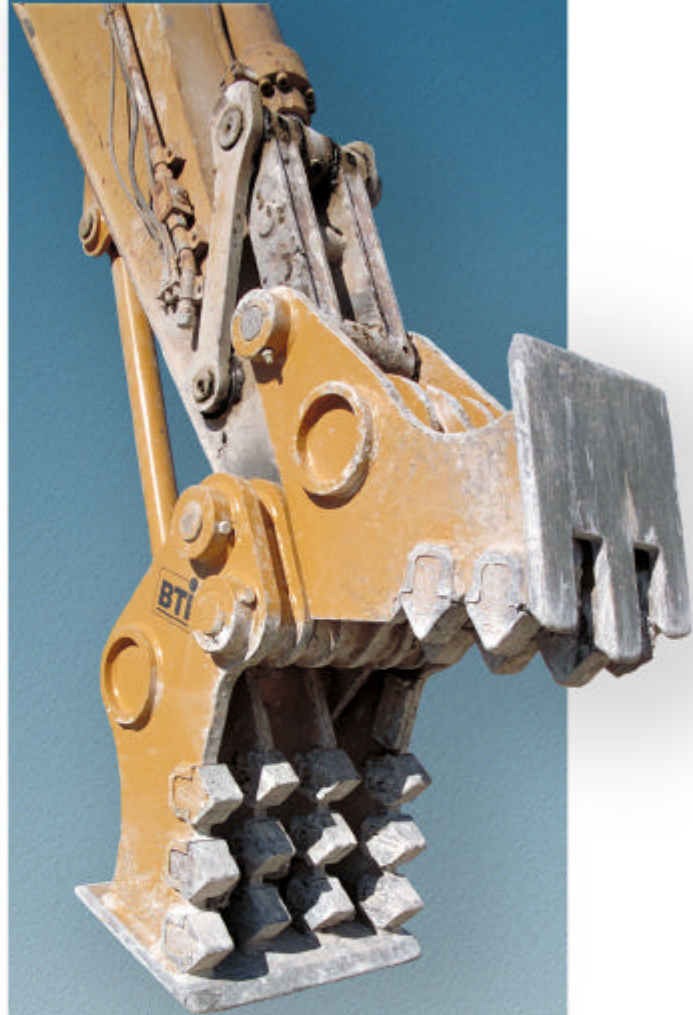

Unique Replaceable Tooth System:




BTI's unique replaceable tooth design allows each tooth to be easily replaced or changed in the field.


Replaceable teeth eliminate the need to build up and hardface, resulting in 10-15% more production time.

The rate of wear on each tooth is different depending on its location within the jaw. By rotating the teeth you can ensure the teeth wear evenly, providing the maximum service life.

The teeth are arranged to provide maximum penetration. Once the concrete has been broken, the two jaws will mesh past each other, pulverizing the concrete, leaving the reinforcing steel clean and separated.

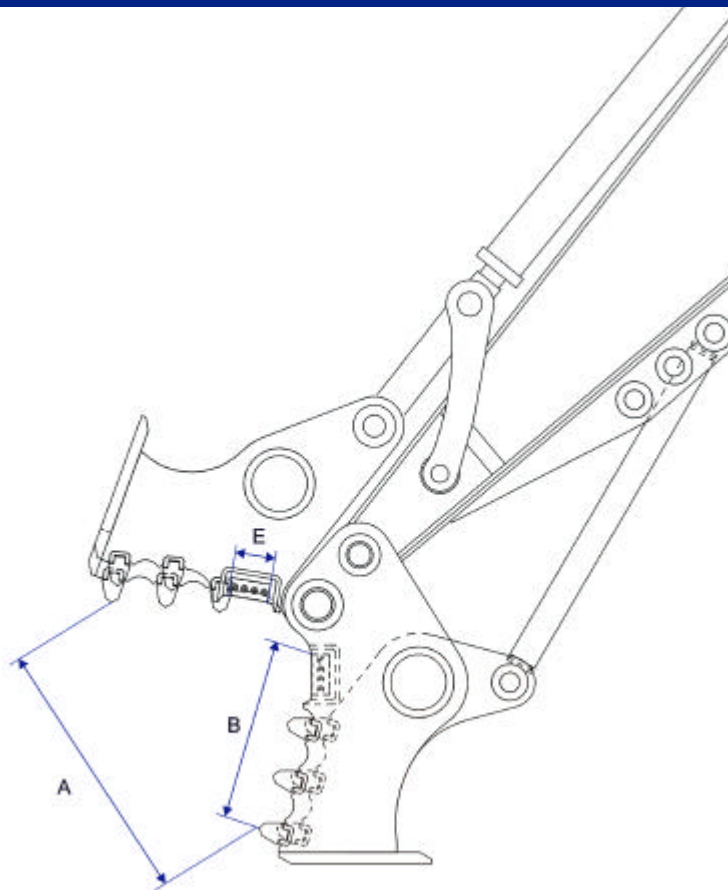

Upper (Moveable) Jaw

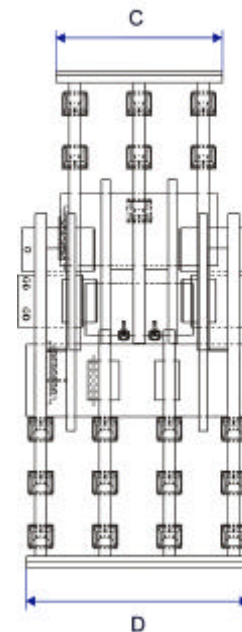

Lower (Fixed) Jaw

General Specifications	Unit	CCP900	CCP1000
Weight	lbs	4,500	6,200
Jaw Opening (A)	inches	42	48
Force @ Outer Tip	tons	52	80
Approx. Open Time	seconds	2.5	2.6
Approx. Close Time	seconds	5.1	5.8
Jaw Depth (B)	inches	28	35
Jaw Width - upper moveable (C)	inches	22	29
Jaw Width - lower fixed (D)	inches	32	38
Cutter Length (E)	inches	7	7
# of Teeth	#	19	19
Recommended Carrier Range	lbs	65,000-88,000	88,000-120,000

All dimensions and specifications are approximate and subject to change without notice. Specifications will vary depending on size and model of carrier used.

Authorized Dealer



www.rockbreaker.com

Breaker Technology, Inc.

Western US & Mexico
3464 Durahart Street
Riverside, CA 92507
Tel: (909) 369-0878
Fax: (909) 369-8281

Eastern US
30625 Solon Industrial Pkwy
Solon, OH 44139
Tel: (440) 248-7168
Fax: (440) 248-8645

Breaker Technology Ltd.

Canada & International
35 Elgin Street North
Thornbury, Ontario N0H 2P0
Tel: (519) 599-2015
Fax: (519) 599-6803

